

X-TREME-Transportring, TWN 1830


with ball bearing, screw type

X-TREME good!

NEW



- Available in screw size M6 - M16
- Full Working Load Limit in all directions
- Unrestricted functions even under extreme pull
- Turnable under load
- Special wide intermediate link
- Easy inserting of the load hook
- Simple greasing due to grease nipple
- Fast assembly with standard tools
- Compact design for use in confined spaces
- Variable screw lengths upon request
- High surface protection with powder coating, electro galvanizing and yellow chromating
- Screw transport protection with wax cover
- 3D-datas IGES/STEP available
- 100 % magnetic crack tested
- BG-approved

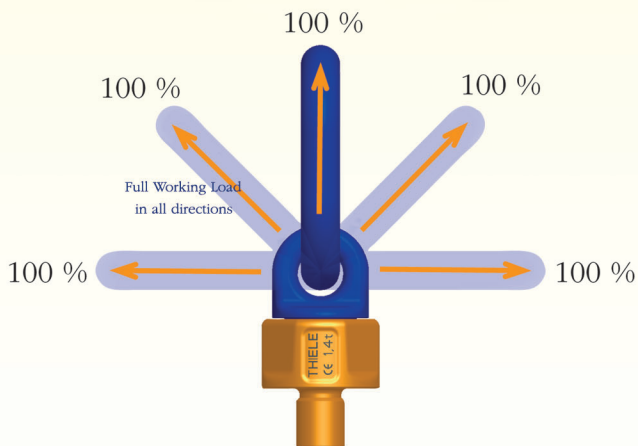

www.kwschain.com · sales@kwschain.com

KWS Inc. · P.O. Box 470487, Tulsa · OK 74147
 Phone (918) 665-4114 · Fax (918) 665-4118 · Toll Free: 800-872-9313